


## Portable Compressors **MOBILAIR M 36 / M 45**

With the world-renowned SIGMA PROFILE 

Free air delivery 3.6 to 4.2 m<sup>3</sup>/min



## Made in Germany

KAESER's renowned MOBILAIR range of portable compressors is manufactured in a state-of-the-art production facility located directly next to the KAESER main plant in Coburg, Northern Bavaria. Equipped with the very latest technology, the recently modernised portable compressor




plant boasts TÜV (German Technical Inspection Agency) certified sound testing facilities for free-field sound level measurement, an advanced powder coating installation and highly efficient production logistics. With minimal turn-around time, KAESER's highly qualified personnel are able to

assemble portable compressors of all sizes and equipment levels to suit our customers' specific needs.

## Durable and versatile

The M 36 and M 45 are in a class of their own when it comes to versatility, as they can be specifically tailored to meet the needs of the relevant application. Options include air treatment components, a three-phase synchronous generator, a choice of a fully galvanised chassis with overrun brake and a fixed or height adjustable tow bar, or stationary versions either installed on skids or machine mountings.

## A look under the enclosure

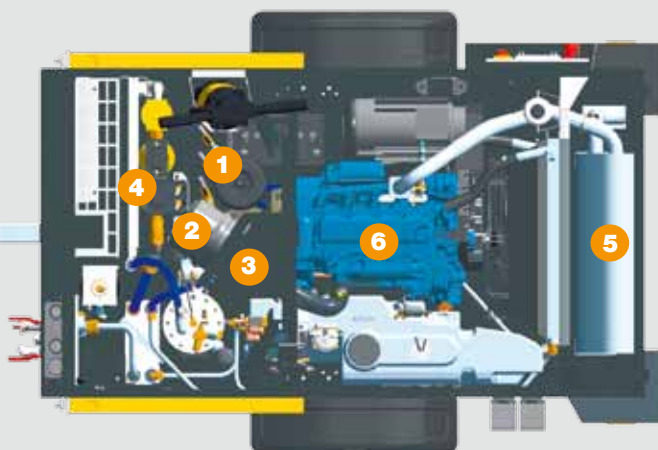

- 1 Compressor air filter
- 2 Engine air filter
- 3 SIGMA airend
- 4 Compressed air treatment (Optional)
- 5 Internal exhaust silencer (protected from potential damage)
- 6 Diesel engine
- 7 Generator (Optional)

# MOBILAIR M 45 / M 45-G / M 36-G

## Superior Power and Performance

### Large sound enclosure

Optimal component accessibility for ease of maintenance.



### Fully galvanised ALKO chassis

1000 kg axle load for M 45 without generator

### Fully galvanised Knott chassis

1200 kg axle load for M 36 and M 45 with generator

### Ambient temperature

Standard models can be used in ambient temperatures ranging from -10 °C to +50 °C, whilst the low temperature versions can be used in temperatures as low as -25 °C.



### The perfect energy-saving combination: Kubota engines and KAESER compressors

The M 36 and M 45 feature a specially designed energy-saving SIGMA Profile airend, which is directly driven by a water-cooled four-cylinder Kubota diesel engine. Direct drive eliminates the transmission losses associated with other systems, consequently providing more air for less fuel. A fuel filter with water separation capability further enhances reliability and is fitted as standard.





# MOBILAIR M 45 / M 45-G / M 36-G – Maximum Versatility



## User-friendly operation

The user-friendly control and instrument panel enables all information to be viewed at a glance. Features include: automatic monitoring and shutdown and gentle start option for cold conditions. Clear icons further enhance user-friendliness.



## Dedicated intake filter

Generously sized for increased reliability and operational life, also enables quick on-site filter change.



## Large capacity, transparent fuel tank

When fully filled, the tank carries sufficient fuel for an entire work shift without the need for refuelling. Diesel line deaeration is made simple via the fuel feed pump (Start switch).



## Generator

The M 36's 3-phase generator (IP54) delivers impressive power of 13 kVA, whilst the M 45's provides 8.5 kVA. These brushless generators are maintenance-free and, depending on energy requirement, can be switched from continuous operation to energy saving automatic start mode.



## Cool, clean compressed air

The compressed air is cooled to 7 °C above ambient temperature. Accumulated condensate is able to drain away easily, as the compressed air cooler is installed at an angle, whilst the hot exhaust gasses from the motor are also used to aid condensate evaporation. This design consequently ensures reliable frost prevention during the winter months.

Additional air treatment components need to be installed downstream from the after-cooler and centrifugal separator (e.g. filter combinations for concrete cleaning as per ZTV-SIB) in order to achieve compressed air of a specified quality class (see next page). The differential pressure indicator enables filter status to be monitored quickly and easily.



## Patented Anti-Frost Control

Specially developed for portable compressors, KAESER's patented Anti-Frost Control automatically regulates operating temperature in relation to ambient. This not only prevents tools from freezing, but also extends air tool service life and availability.



## Hose reel

The optionally pre-installed hose reel holds 20 m of lightweight hose which does not have to be fully reeled out for operation. As the hose is installed within the compressor unit, this not only enhances hose service life and availability, but also protects it from damage (splitting, stretching, being run over) and contamination.























## Generator version

The switch panel – which can be equipped with a cover flap if required – features splash-protected sockets in accordance with IP 44 and a lockable main switch. The safety cut-out system with insulation monitoring makes earthing superfluous.






## Air treatment systems

<b>System A</b> <ul style="list-style-type: none"> <li>• Cool</li> <li>• Condensate-free</li> </ul>	 		Cool, condensate-free compressed air (100 % saturated), <b>for powering air tools and temporarily replacing stationary compressors</b>
<b>System F</b> <ul style="list-style-type: none"> <li>• Cool</li> <li>• Condensate-free</li> <li>• Filtered</li> </ul>	  		Cool, condensate-free compressed air (100 % saturated), <b>free from dirt particles and oil in accordance with applicable regulations</b>
<b>System B</b> <ul style="list-style-type: none"> <li>• Warmed</li> <li>• Dried</li> </ul>	   		Dried compressed air, warmed to approx. 20 °C, <b>for working at sub-zero temperatures and with long air lines</b>
<b>System G</b> <ul style="list-style-type: none"> <li>• Warmed</li> <li>• Dried</li> <li>• Filtered</li> </ul>	    		Dried compressed air, warmed to at least 20 °C, <b>free from dirt particles and oil in accordance with applicable regulations</b>
<b>Fresh air</b>  Partial flow as fresh air			Odour-free fresh air connected via a <b>separate</b> quick-release coupling (Only in combination with one of the above mentioned air treatment systems)

Additional air treatment systems for the MOBILAIR M36 and M45 are available upon request. Please contact Kaeser for further details.

## Dimensions

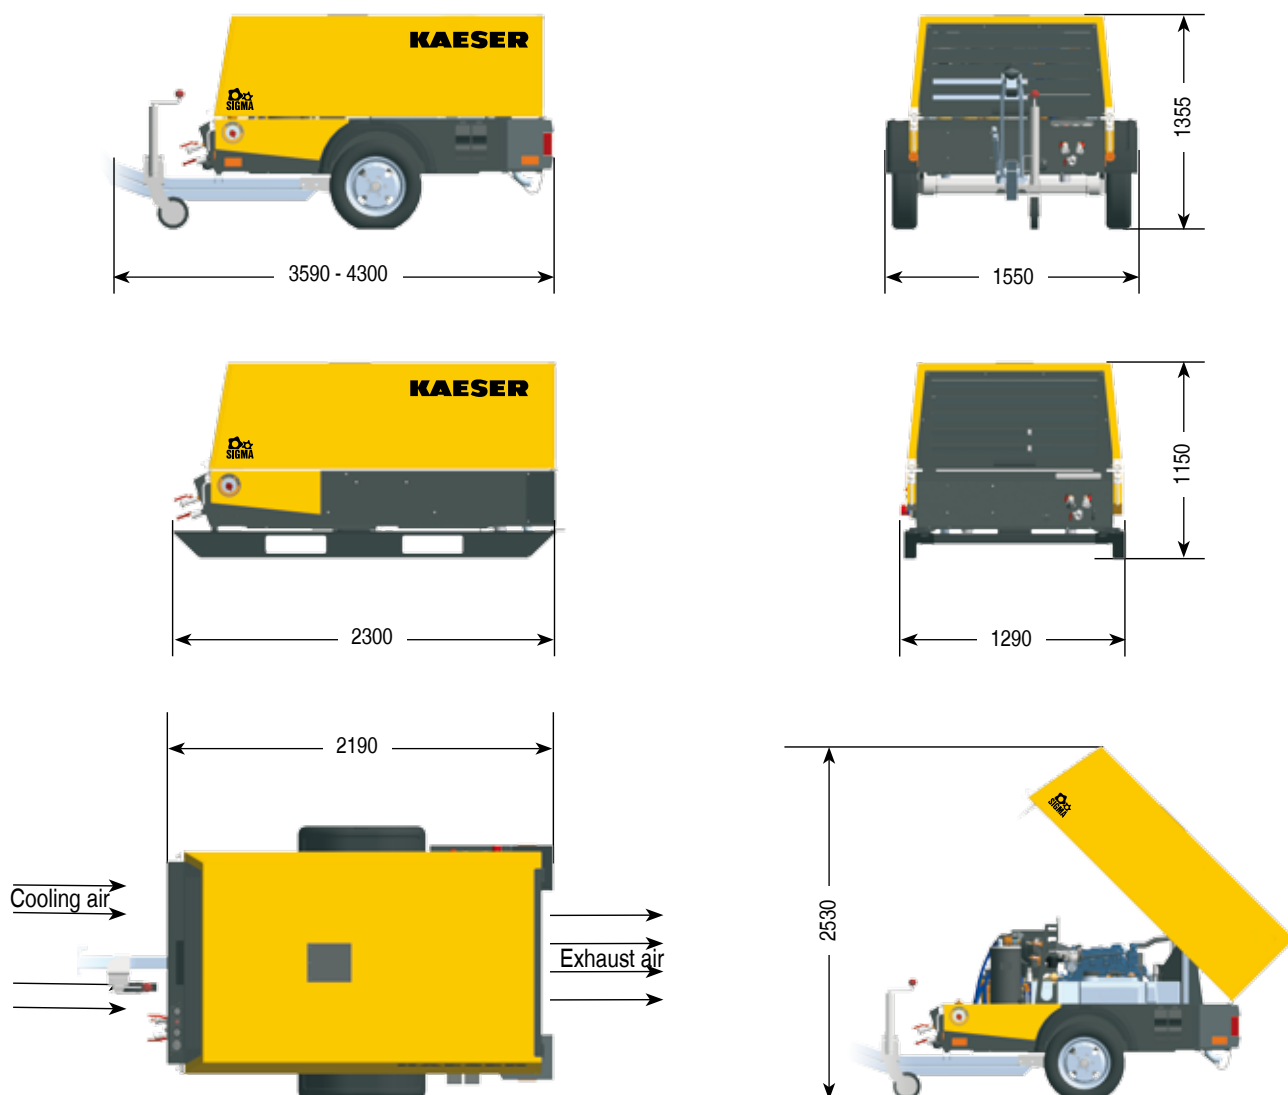

## Technical specifications – MOBILAIR M 36 / M 45

Model		M 45		M 45-G 8.5 kVA		M 36-G 13 kVA
FAD	m³/min	4.2	4.15	4.2	4.15	3.9
At working pressure	bar	7	10	7	10	7
Drive motor (water-cooled)		Kubota V2203				Kubota V2403
Rated engine/motor power	kW	35.4				36
Speed at full load	rpm	2800				2600
Idling speed	rpm	2000				2000
Fuel tank capacity	l	80				80
Compressor cooling fluid volume	l	9				9
Operational weight	kg	995		1125		1145
Permitted total weight (Axle load)	kg	1000		1200		1200
Sound power level*	dB(A)	≤98		≤98		≤98
Sound pressure level**	dB(A)	69		69		67
Compressed air connection		2x G¾, 1x G1				
Optional air treatment equipment		Available				

\*) Guaranteed sound power level to directive 2000/14/EU – Stage 2, guaranteed sound power level – \*\*) Surface sound pressure level to ISO 3744, (r = 10 m)



# KAESER – The world is our home

As one of the world's largest manufacturers of rotary screw compressors, KAESER KOMPRESSOREN is represented throughout the world by a comprehensive network of branches, subsidiary companies and authorised partners in over 60 countries.

With innovative products and services, Kaeser Kompressoren's experienced consultants and engineers help customers to enhance their competitive edge by working in close partnership to develop progressive system concepts that continuously push the boundaries of performance and compressed air efficiency. Moreover, the decades of knowledge and expertise from this industry-leading system provider are made available to each and every customer via the Kaeser group's global computer network.

**KAESER**  
COMPRESSORS*Built for a Lifetime!*

**KAESER COMPRESSORS Australia Pty. Ltd.**  
Locked Bag 1406 – Dandenong South – Vic. 3164  
45 Zenith Road – Dandenong – Vic. 3175  
Phone: +61 3 9791 5999 – Fax: +61 3 9791 5733  
[www.kaeser.com](http://www.kaeser.com) – E-mail: [air@kaeser.com.au](mailto:air@kaeser.com.au)